


Thank You for
choosing VYCO™

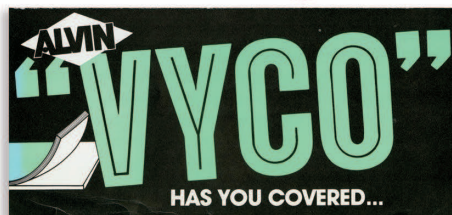

"This is the original genuine VYCO board cover that was distributed by Alvin & Co. since 1970."

FEATURES

- Durable 5-Ply 1mm thick vinyl protects your surface with a soft, smooth, self-sealing and stain resistant cover for your creative space.
- Ideal for drawing boards, drafting tables, art surfaces, desks, workbenches, studios, counter tops, shelving, workshops and more...
- Reversible cover has a glare free finish that provides twice the life, guaranteed not to crack or discolor.
- It is versatile and has almost unlimited uses.

CLEANING

VYCO cover is easy to clean with only soap and water or mild household cleaners. Avoid using aggressive or abrasive cleaners as they may damage the vinyl material. Test cleaners on an inconspicuous place before proceeding.

CAUTION

- VYCO is not for applications that use heat guns, glue guns, soldering irons or other direct heat sources
- VYCO is NOT a cutting mat surface
- Keep VYCO out of direct sunlight

Saving Surfaces
Since 1970


VYCO is available in different colors and sheet sizes ranging from 18" x 24" up to 43.5" x 84". Custom sheet sizes and 10 yard rolls are also available.



Green / Cream



Gray / White

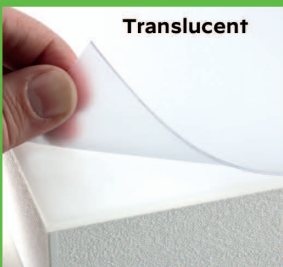

Translucent



VYCO Tape

vycocover.com



VYCO is distributed by Creative Device Inc.
© 2021, VYCO is a trademark of Creative Device Inc.




"We got it covered!"

VYCO™ Installation Instructions

Tools required: Utility knife or scissors, straightedge and 1" double side-tape

1

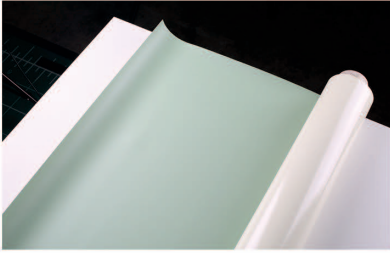

Unroll and lay flat for at least 24 hrs. VYCO is produced and shipped in tension wound rolls and needs to relax before being securing to your surface. For best performance, unroll and lay flat at room temperature for at least 24 hrs for material to return to its flat state.

4



Clean and prepare table surface. VYCO cover is soft, pliable and will conform to the surface beneath. Dirt and imperfections under the VYCO will create an uneven work surface. Be sure to remove all particles of dirt and dust before attaching VYCO.

7



Position sheet on tabletop. With the top tape liner still in place, position the VYCO on the tabletop in its exact location.

2



TIP: To help the VYCO to relax and flatten out, we recommend placing books on top of it. The weight of the books will help with flattening. Always make sure your VYCO is not in direct sunlight. Sun can cause warping of the vinyl.

5



Apply 1" wide double-sided tape to surface. Leave top liner on tape for time being. For many applications tape only needs to be used along the top edge of tabletop. For a more secure fit, apply tape along the other three edges as well.

8



Then, without moving the sheet, raise back the top edge and slowly peel off the tape liner beneath. Pressing down the VYCO cover right behind the liner as it comes off. This will help keep the cover in position during connection with the tape.

3



Cut to size. Sheets are slightly oversized to allow for variations in board and top sizes. For best fit, trim down to the exact dimensions of the surface. This can be done either before or after the VYCO is adhered. Use a utility knife or scissors and a straightedge for accuracy.

6



Apply tape along the outer edges only, never in the middle. Use only thin polyester-based tapes for smooth results. Foam-based tapes are too thick and will create a raised surface. Deep imperfections can be filled with a wood filler and sanded smooth.

9



Smooth VYCO out from center to prevent wrinkling, as shown in above, before following the same procedure with other tape edges, if so desired.

Enjoy the surface!